

BX SERIES ME 4-12

AUTOMATIC REAM OVERWRAPPER



BX RANGE,
ME 4-12

OVERWRAPPING MACHINERY



FEATURES:

- Diverse pack size and type capability
- Integral, variable speed infeed conveyor
- AC inverter and geared motor drive
- Positive in-line mechanical film draw
- Envelope end fold wrap and concealed base overlap
- Low level, cantilevered film spindle for ease of loading
- Film splicing deck
- High level quick access guards
- Fast and tool-less size change
- Full feature diagnostic panel
- Supplied on castors for manoeuvrability

OPTIONAL FEATURES:

- Automatic collator
- Tear tape applicator with extended tab for easy opening
- Print registration unit
- Additional cantilevered film spindle with low filmwarming
- Any conveyor and control handling combination
- Product handling systems, coders and labellers
- Sleeve wrap and full overwrap capability
- Uncoated paper overwrap with cold glue for seals

BX SERIES ME 4-12


OPERATING PRINCIPLE



**BX RANGE,
ME 4-12**

OVERWRAPPING MACHINERY

OVERWRAPPER

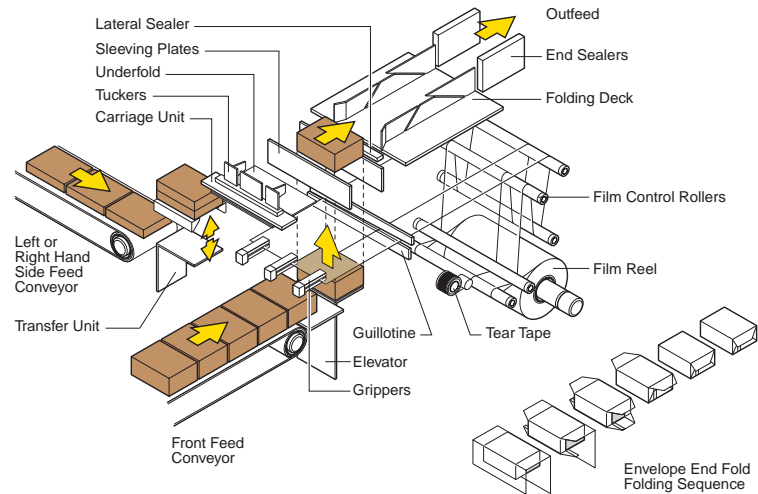

TECHNICAL DATA:

Film length: 80 - 865 mm
Film Width: 75 - 554 mm
 Film widths and lengths outside this range can be achieved by special design

Wrap materials: Most heat sealable films and papers
Product size range: Length: 50 - 450 mm
 Width: 22 - 350 mm
 Height: 10 - 175 mm

Product sizes outside this range can be accommodated by special design

Size change time: Approximately 20 minutes.
Output: Up to 50 packs per minute, depending on product size
 Greater speeds can be achieved against special design

Marden Edwards Limited
 2 Nimrod Way
 Ferdown Industrial Estate
 Wimborne Dorset
 United Kingdom
 Tel: +44 (0) 1202 861200
 Fax: +44 (0) 1202 861400

Email: me@mardenedwards.com
 Web: www.mardenedwards.com

Marden Edwards Inc
 1866 Verne Roberts Circle
 Antioch
 CA 94509-7909
 USA
 Tel: +1 (925) 777 1403
 800 332 1838
 Fax: +1 (925) 777 1406

Email: usa@mardenedwards.com
 Web: www.mardenedwards.com

